


Pigtails HP 603

- 6 mm stainless steel tube, ideal for space saving cabinet applications
- check valve optional

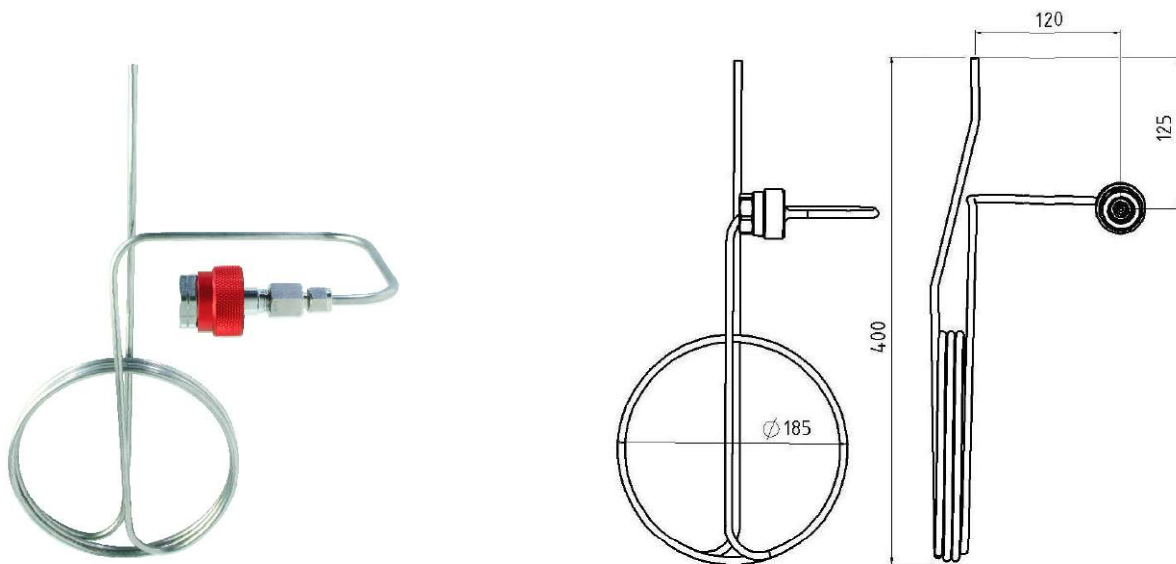

Pigtails in stainless steel 1.4404 are for connecting gas cylinders with gas supply panels.
The pigtails are fitted with a hand nut and gas specific connections to DIN477 -1 or -5 (300 bar).

ORDER NUMBER	OPTIONAL CHECK VALVE	PRESSURE RANGE	CYLINDER CONNECTION	OUTLET
HP60301	RV	to 200 bar	W21,8 x 1/14" left	6 mm tube
HP60305	RV	to 200 bar	W 1" left	6 mm tube
HP60306	RV	to 200 bar	W21,8 x 1/14" right	6 mm tube
HP60308	RV	to 200 bar	W 1" right	6 mm tube
HP60309	RV	to 200 bar	G 3/4" right	6 mm tube
HP60310	RV	to 200 bar	W24,32 x 1/4" right	6 mm tube
HP60311	RV	to 200 bar	G 3/8" right	6 mm tube
HP60313	RV	to 200 bar	G 5/8" right	6 mm tube
HP60314	RV	to 200 bar	M19 x 1,5 left	6 mm tube
HP6030170	RV	to 300 bar	W30 x 2 right	6 mm tube
HP6031170	RV	to 300 bar	W30 x 2 right	6 mm tube
HP6032170	RV	to 300 bar	W30 x 2 left	6 mm tube
HP6034170	RV	to 300 bar	W30 x 2 right	6 mm tube

Pigtails with connections to other national standards on request.

When ordering, please specify type of gas.

TECHNICAL DETAILS		QUALITY STANDARD
Material:	stainless steel 1.4404 electropolished	The company Hornung is certified to DIN EN ISO 9001 and ISO 14001:2009 . All single parts are manufactured, assembled and tested by in-house production. The finished parts are therefore under all criteria of German quality control with 100% final inspection.
Connection:	connecting thread DIN 477-1 or -5 (300 bar)	
Gas purity:	≤ 6.0	