

Line pressure regulator HP 350

- single stage for high flow and high outlet pressure (up to 50 bar) – with a balanced poppet




Fittings and gauges optional

TECHNICAL DETAILS		DESCRIPTION	APPLICATION AREA
Body:	Brass, nickel and matt chrome plated or stainless steel 1.4404 electropolished	The line pressure regulator HP 350 is a single stage pressure regulator, brass nickel and matt chrome plated or stainless steel 1.4404 electro polished.	The line pressure regulator HP 350 is a single stage pressure regulator with a high flow rate and is designed for pressure reduction of high purity gases.
Seat:	PCTFE	It is designed as a diaphragm pressure regulator and especially made for high outlet pressure.	The HP 350 reduces the pressure of compressed gases or fluids to a maximum outlet pressure of 50 bar.
Diaphragm:	1.4435		
Leakage rate:	10 ⁻⁸ (mbar l/s) Heliumleaktest	The HP 350 reduces the pressure of compressed gases or fluids to a maximum outlet pressure of 50 bar.	It functions according to the principle guiding the equilibrium of forces between the set spring force and the outlet pressure.
Gas purity:	≤ 6.0	It can be equipped optionally with a outlet gauge.	The line pressure regulator HP 350 is equipped with a balanced poppet and by so doing ensures constancy in operating pressure during the entire gas withdrawal process, and occurring decrease in inlet pressure.
Max. inlet pressure:	300 bar		
Outlet pressure ranges:	0,1-1,7; 1-3,5; 1-7; 1-12; 1-17; 1-30; 1-50 bar	The line pressure regulator with integrated balance poppet ensures a constant outlet pressure even when the initial pressure drops.	Special characteristics: The line pressure regulator HP 350 is characterized through his high control accuracy at the pressure area from 0.1 bar to 50 bar.
Operating temp.:	-20°C to +70°C	Degreasing under pressure.	
Gauges:	Safety version to EN 837-1 KL1.6		
Dimensions (wxhxd):	122 x 123 x 126 mm		
Weight:	1750 g		
Connections:	NPT 3/8" f / NPT 1/2" f		


QUALITY STANDARD

The company Hornung is certified to **DIN EN ISO 9001:2008** and **ISO 14001:2009**. All single parts are manufactured, assembled and tested by in-house production. The finished parts are therefore under all criteria of German quality control with 100% final inspection.

HP 350

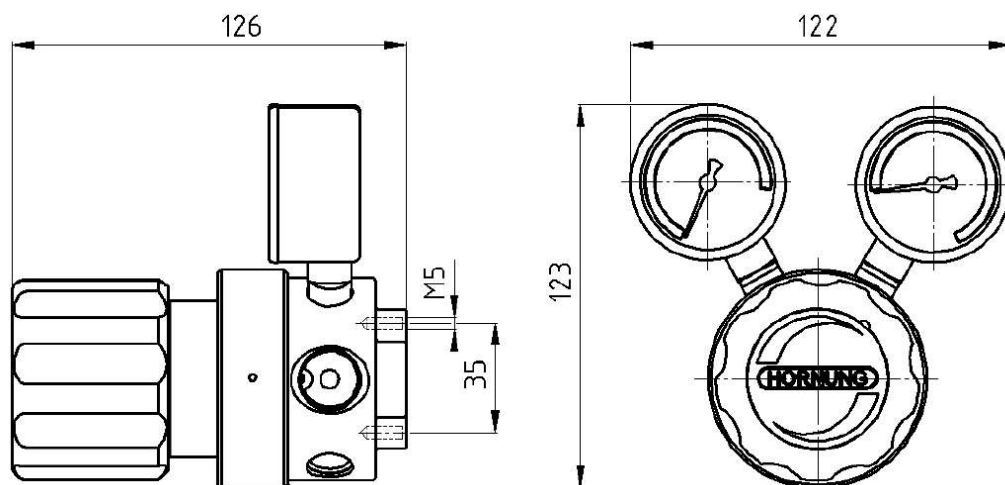

FLOW CURVE

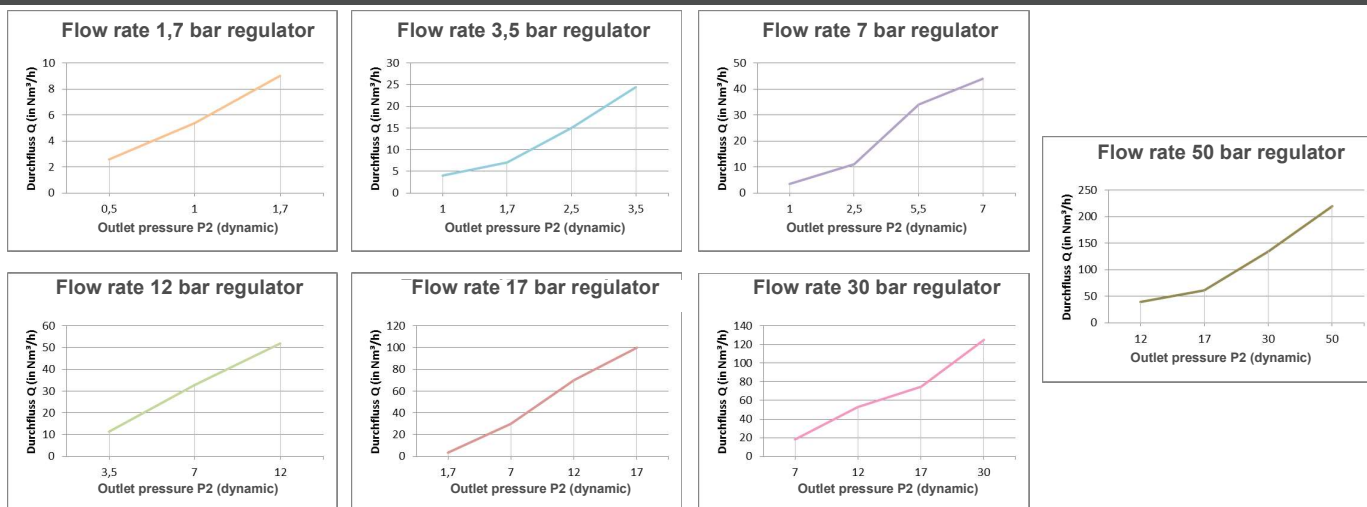

ORDER DETAILS

Material:	Inlet:	Outlet pressure ranges:	Gauges:	Option on the front and back:			
1 = Stainless steel 2 = Brass	1 = left to right 2 = right to left	1 = 0,1 - 1,7 bar 2 = 1 - 3,5 bar 3 = 1 - 7 bar 4 = 1 - 12 bar 5 = 1 - 17 bar 6 = 1 - 30 bar 7 = 1 - 50 bar	1 = none 2 = with inlet and outlet gauges	0 = NPT 3/8" f 1 = NPT 1/2" f 6 = compression fitting 6 mm 8 = compression fitting 8 mm 10 = compression fitting 10 mm 12 = compression fitting 12 mm 15 = compression fitting 15 mm			
HP350- Type	2 Material	3 Inlet	2 Outlet	1 Gauge	6 Option	Gas type	

Accessories: see total catalogue segment

7. Gauges, fittings and accessories